


SWITCH-4P

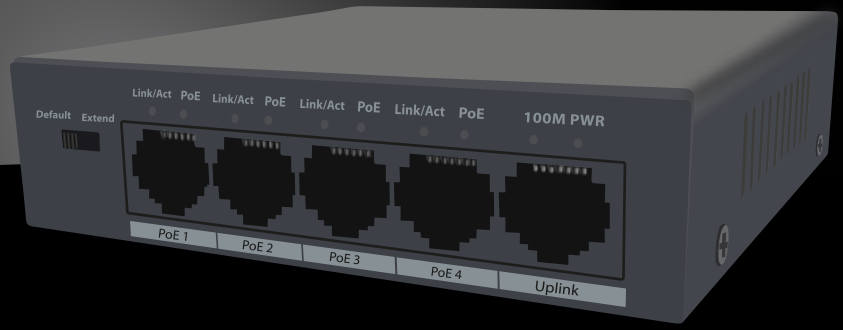

Key Features:

- 4 port PoE & PoE+ & 1 uplink port (10/100Mbps)
- Supports up to 15.4W per port
- Total power budget : 72W
- Plug & Play
- Status LEDs
- PSU included

SPECIFICATIONS

Network Standards	IEEE802.3i 10BASE-T IEEE802.3u 100BASE-TX IEEE802.3x Flow Control
POE Power	15.4W per port (IEEE802.3af) Wiring: Data & power provided over pairs 1/2 and 3/6 or 4/5 (+) and 7/8 (-) Cable: UTP CAT5e or higher
Processing Types	Store and forward Half-duplex back pressure and IEEE 802.3x full-duplex flow control
Buffer memory	48Kb embedded memory per unit
Network Latency	Less than 20ms for 64-byte frames in Store and forward mode
Power Input	48VDC input
POE power consumption per port	15.4W
Casing	Metal case
Dimension	217 x 105 x 28mm (LxWxH)
Weight	0.63KG
Installation	Desktop
LED Indicators	System: Power, POE Maximum power Per port: Link Activity, Speed, POE active, POE error
Operating Temperature	0 – 55°
Storage Temperature	-10 - 70°
Operating humidity	90% max relative humidity, non-condensing
Storage humidity	90% max relative humidity, non-condensing

