

SPRO®

DHVDPKIT01

2MP IP Home Intercom Kit



MICROPHONE



IP65



VANDAL PROOF



DAY/NIGHT



DC12V



IPHONE & ANDROID PHONE VIEWING

Key Features:

- 2MP CMOS camera
- Mechanical button
- Night vision & Voice indication
- Group call
- Surface mounted
- IK07 & IP65

Door Station Specification

Model Number	DHVDPKIT01
Main Processor	Embedded Processor
Camera	1/2.8" 2MP CMOS high definition low illumination colorful
Angle of View	H:160°, V:82°,D:180°
Focal Length	2 mm
WDR	Support
Noise Reduction	Noise suppression and echo cancellation
Video Encoding	H.264
Frame Rate	25 fps
Audio Encoding	G.711 U
Video Bit Rate	256 K to 2 M
Light Compensation	IR Supplement

(continued)

Port	
RS-485 Port	1
Alarm Output/Input	1/1
Lock Control	1 set
Door Status Detection	1 set
Eoc	1 set
Exit Button	1
Tamper Switch	1 set
Network Interface	1
Power Output	12V/100mA1
Alarm Parameter	
Tamper Alarm	Support
Door Sensor Timeout Alarm	Support
Alarm Input	Support
Alarm Output	Support
User Parameter	
Audio Input	Built-in Omnidirectional Microphone
Audio Output	Built-in Loudspeaker
Status Indicator	Calling & Communication & Unlocked
Communication Methods	Digital communication
Unlock Mode	Remote unlocking
Auto Snapshot	Support
Leave Videos	Support
Storage	Extended 64 G TF Card
WEB Configuration	Support
Real-time Monitor	Support
Normal Parameter	
Housing Material	Alumimum
Power Supply Mode	POE or DC 12V
Installation Method	Supports surface mounted and flush mounted
Dimensions	130 mm×96 mm×28.5 mm

(continued)

Working Temperature	-30°C to +60°C (-22°F to +140°F)
Power Consumption	≤12W
Total Weight	0.35kg / 0.77lb

Monitor Specification


Main Processor	High performace embedded processor
Operating System	Embedded LINUX OS
Screen Type	Capacitive screen
Display	7-inch TFT screen
Resolution	1024 × 600
Video Compression	H.264
Audio Compression	G.711A/G.711U/PCM
Audio Input	1 channel all-direction microphone
Audio Output	Built-in 1.5W loudspeaker
Audio Mode	Support dual-way bidirectional talk
Audio Enhancement	Support echo cancellation/DNR
Audio Bit Rate	16 kbps
Communication Mode	Full digital
Information Release	Support to receive and view notifications issued by center
Leave Videos	Support
DND Mode	Support to set DND period
Sub-station Quantity	9
Alarm Input	6 channel (switch quantity)
Alarm Output	1 channel
Network	1 RJ-45
SOS Alarm	Support
Casing	PC+ABS
Appearance Color	Appearance Color

General

Power Supply	POE or DC 12V
Installation	Wall mount
Accessories	Default bracket Default alarm cable

(continued)

Dimensions	119.6 mm × 221.5 mm × 21.5 mm (4.71" × 8.72" × 0.85")
Operating Temperature	-30°C to +60°C (-22°F to +140°F)
Operating Humidity	-30°C to +60°C (-22°F to +140°F)
Power Consumption	≤6W
Gross Weight	0.35kg / 0.77lb
Power Supply Mode	POE or DC 12V
Storage	8G

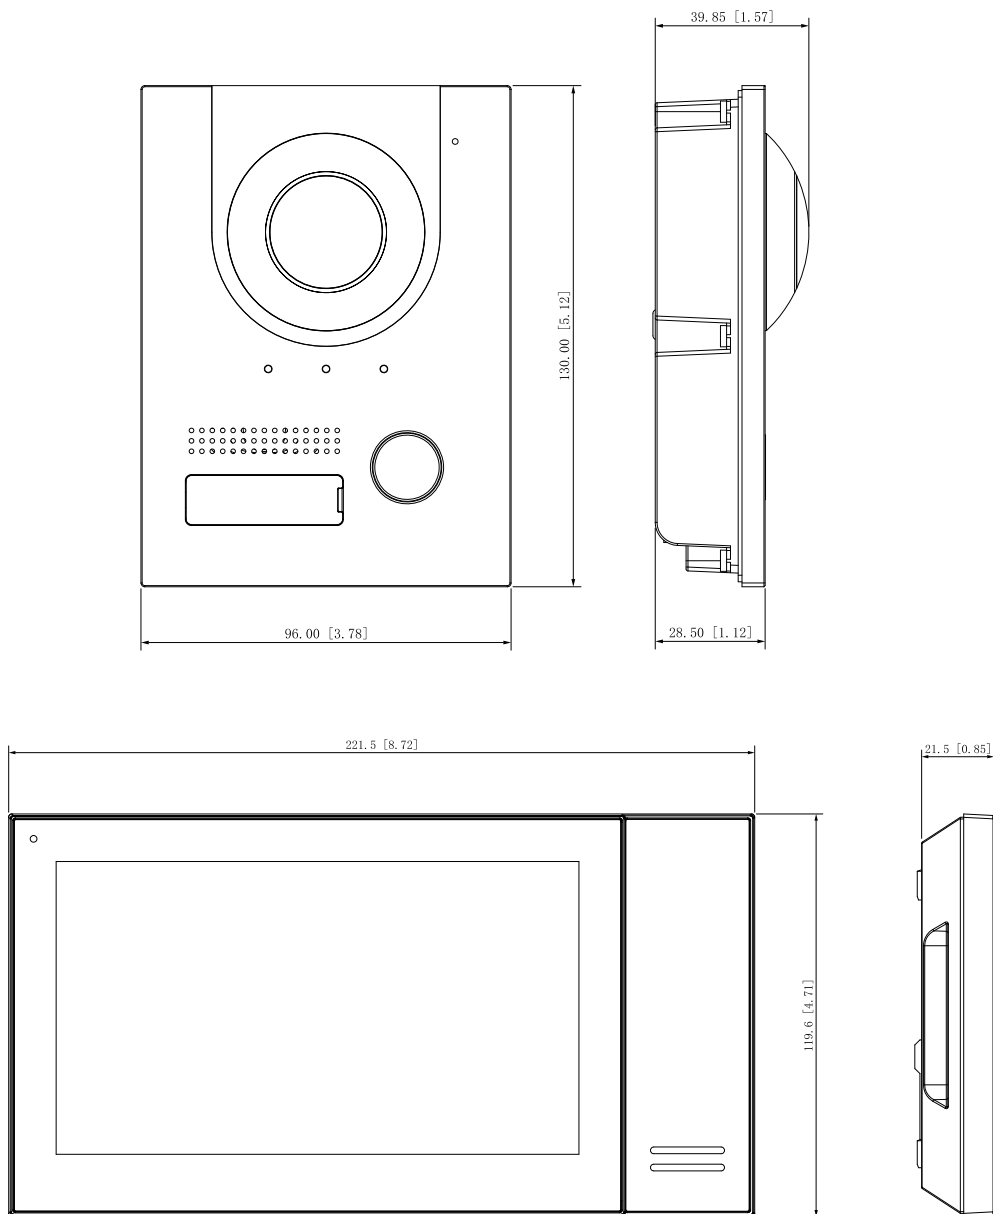

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved