

SPRO[®]

VI-MTR01-7

IP Indoor Monitor Station



MONITOR



ENTRYPHONE



ALARM



MICROPHONE

Key Features:


- 7" TFT Capacitive touch screen
- IPC surveillance
- Alarm integration
- Touch buttons / Touch Screen

SPECIFICATIONS

Model Number	VI-MTR01-7
Main Processor	Embedded Micro Processor
Operating System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 800x480, Capacitive
Operation Mode	
Input	Touch buttons / Touch Screen

(continued)

Interface	
Alarm In	6
Alarm Out	1
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	N/A
Installation	Surface
Power	DC 12V/ POE provided by VI-SWITCH01
Power Consumption	Standby $\leq 1.5W$, Work $\leq 7W$
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	200.5mm×136.5mm×22.0mm
Weight	0.8Kg

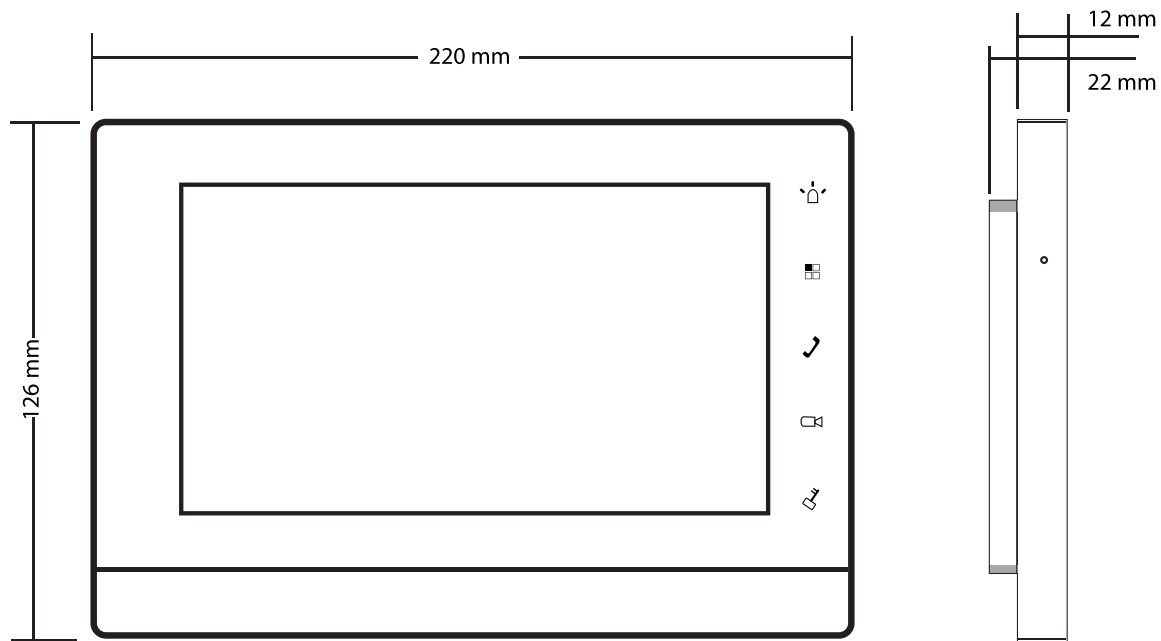

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved