

SPRO®

VI-STN01 IP Outdoor Station



Key Features:

- HD CMOS camera
- Stainless steel panel, IP54, IK07
- Night vision & Voice indication
- Video & Audio messaging
- Remote intercom with mobile APP
- Surface mounted & Flush mounted

SPECIFICATIONS

Model Number	VI-STN01
Main Processor	Embedded Micro Processor
Operating System	Embedded LINUX OS

Video



Video Compression	H.264
Image Sensor	1/4" 1MP CMOS
Lens	2.8mm
Angle of View	D:80° H:75°
Day/Night	Color Image

Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

(continued)

Operation Mode	
Keypad	Single Mechanical Button
Interface	
Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Ingress Protection	IP54, IK07
Tamper Switch	1
Installation	Surface & Flush
Material	Stainless Steel
Power	DC 12V
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-40°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	129.9mm×32.2mm×140mm
Weight	0.8Kg

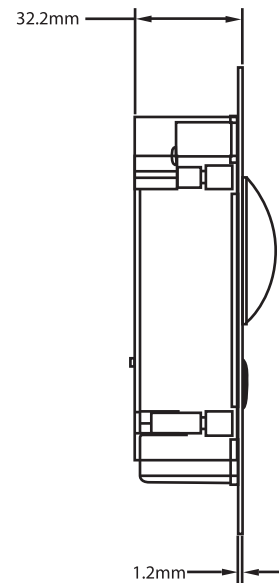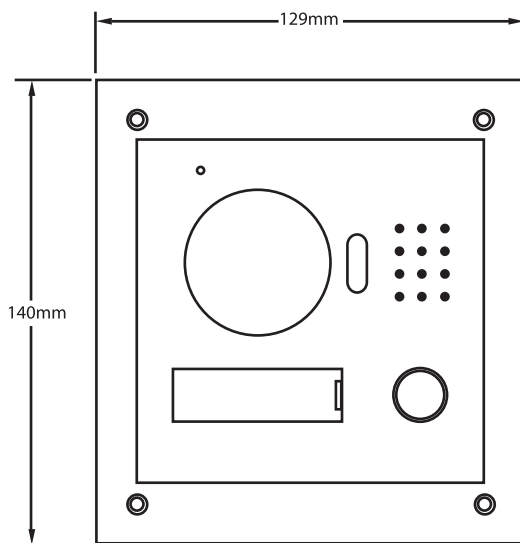

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved