


**SPRO**<sup>®</sup>



## DHDVR06-B2-V3

6 Channel 5MP Lite DVR 5 in 1 (CVI / TVI / AHD / ANALOGUE / IP)  
No Port Forwarding Required for Smart Phone/Windows PC/Apple Mac Viewing

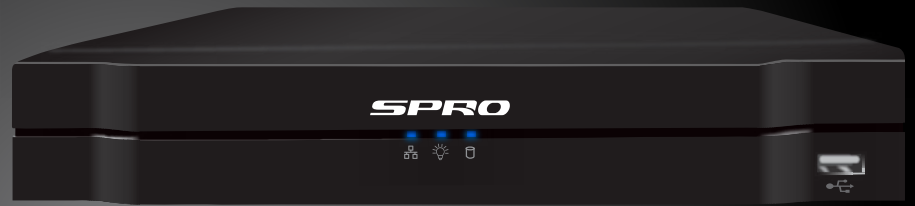

### Key Features:

- 6 channel recording (4 channel BNC + 2 channel IP).
- 5 IN 1 ( CVI / TVI / AHD / ANALOGUE / IP )
- P2P (no port forwarding required) - Apple app/Android app/Windows PC/Apple Mac
- 5MP-N@10fps, 1080P@15fps , 720P@25fps
- 5MP-N@10fps, 2MP@25fps IP realtime recording
- Audio over co-ax supported on all BNC Channels
- ONVIF 2.4 compatible : Dahua, Hikvision, Arecont Vision, AXIS, Bosch, Brickcom, Canon, Honeywell, Panasonic, Pelco, Samsung, Sony, Vivotek and etc.
- IP spot via network (no convertor required)
- 4 channel playback at the same time.
- PTZ control over 1 co-ax cable (mouse control on DVR - area zoom & scroll zoom)
- Instant playback on one channel when others are on live viewing
- Smart search & email notification (snapshot)
- Intelligent feature : Facial & Tripwire detection (BNC channel only)
- Backup footage by video clip while viewing playback

### SPECIFICATIONS

<b>Model Number</b>	DHDVR06-B2-V3	
<b>Main Processor</b>	Embedded processor	
<b>Operating System</b>	Embedded LINUX	
<b>Video and Audio</b>		
<b>Input</b>	6 channel (4 x BNC + 2 x IP)	
<b>Standard</b>	5 IN 1	4 channel CVI/TVI/AHD/ANALOGUE
	IP	2 channel (up to 5M-N IP)

(continued)

(continued)

<b>Analog Camera Input</b>	4 Channel, BNC	
<b>HDCVI Camera</b>	5MP-N@10fps, 1080P@15fps, 720P@25fps	
<b>AHD Camera</b>	5MP-N@10fps, 1080P@15fps, 720P@25fps	
<b>TVI Camera</b>	5MP-N@10fps, 1080P@15fps, 720P@25fps	
<b>CVBS Camera</b>	PAL/NTSC	
<b>IP Camera Input</b>	2 Channel, each channel up to 5MP-N@10fps, 2MP@25fps	
<b>Audio In/Out</b>	1/1 RCA, Audio over co-ax supported on all BNC Channels	
<b>Two-way Talk</b>	Reuse audio in/out, RCA	
<b>Display</b>		
<b>Interface</b>	1 HDMI, 1 VGA	
<b>Resolution</b>	1296X1944, 1920×1080, 1280×1024, 1280×720	
<b>Display Split</b>	1/4/6	
<b>OSD</b>	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
<b>Recording</b>		
<b>Video/Audio Compression</b>	H.265+/H.265/H.264+/H.264	
<b>Resolution</b>	5M-N, 1080P, 1080N, 720P, 960H, D1, CIF	
<b>Record Rate</b>	Main Stream	5MP-N(1~10fps)1080P(1~15fps)/1080N/720P/960H/D1/CIF (1~25fps)
	Extra Stream	D1/CIF(1~15fps)
<b>Bit Rate</b>	32Kbps ~ 6144Kbps Per Channel	
<b>Record Mode</b>	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop	
<b>Record Interval</b>	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
<b>Audio Compression</b>	AAC(only for the 1st channel), G.711A, G.711U, PCM	
<b>Audio Sample Rate</b>	8KHz, 16 bit Per Channel	
<b>Audio Bit Rate</b>	64Kbps Per Channel	
<b>Video Detection</b>		
<b>Trigger Events</b>	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips	
<b>Video Detection</b>	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis	

(continued)

**Playback & Backup**

<b>Sync Playback</b>	1/4
<b>Search Mode</b>	Time/Date, MD & Exact search (accurate to second)
<b>Playback Functions</b>	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
<b>Backup Mode</b>	USB Device/Network

**Network**

<b>Interface</b>	1 RJ-45 port (100M)
<b>Network Functions</b>	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search
<b>Max. User Access</b>	128 users
<b>Smart Phone</b>	iPhone, iPad, Android Phone
<b>Interoperability</b>	ONVIF 2.42, CGI Conformant

**Storage**


<b>Internal HDD</b>	1 SATA port, up to 6TB
---------------------	------------------------

**Auxiliary Interface**

<b>USB Interface</b>	2 ports(1 Rear), USB2.0
<b>RS485</b>	1 port, For PTZ Control

**General**

<b>Power Supply</b>	DC12V/2A
<b>Power Consumption</b>	<10W (without HDD)
<b>Working Environment</b>	-10°C ~+55°C / 0%~90%RH
<b>Dimensions</b>	Compact 1U, 260mm × 220mm × 40mm
<b>Weight</b>	1.6 KG(without HDD)

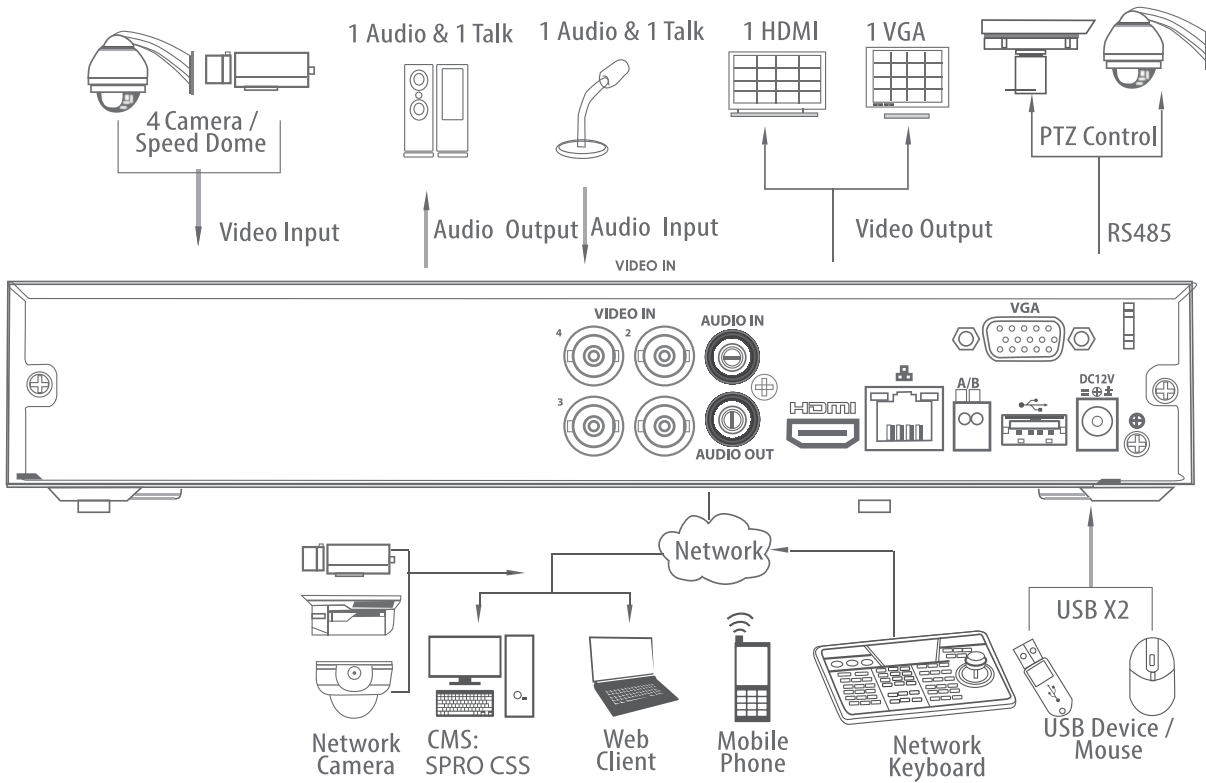

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved