

SPRO[®]**IP**

DHIPD40/2713RW-A

4 Megapixel WDR IP IR Dome Camera



4 MEGAPIXEL



2.7~13.5 MM



50m IR



IP66



Key Features:

- 4 Megapixel progressive scan CMOS
- H.264+ & H.264 dual-stream encoding
- 4M@20fps(2688×1520), 3M@25fps (2304×1296)
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer & CMS(SPRO CSS)
- 2.7~13.5mm motorised lens
- Max. IR LEDs Length 50m
- IP66, PoE



SPECIFICATIONS

Model Number	DHIPD40/2713RW-A
Image Sensor	4 Megapixel progressive scan CMOS
Effective Pixels	2688(H)x1520(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/100000s
Min. Illumination	0.1Lux/F1.4(Color), 0Lux/F1.4(IR on)
S/N Ratio	More than 50dB
Max. IR LEDs Length	Up to 50m
IR On/Off Control	Auto/ Manual
IR LEDs	2

(continued)

Lens		
Lens Type	Motorized	
Mount Type	Board-in	
Focal Length	2.7mm~13.5mm	
Max Aperture	F1.4	
Angle of View	H:100°~35°, V:54°~20°	
Focus Control	Motorized	
Close Focus Distance	0.3m	
Pan/Tilt/Rotation		
Pan/Tilt/Rotation Range	Pan:0°~360°, Tilt:0°~78°, Rotation:0°~360°	
Intelligence		
IVS	Tripwire, Intrusion	
Video		
Compression	H.264+/H.264	
Streaming Capability	2 Streams	
Resolution	4M(2688×1520)/3M(2304×1296)/ 1080P(1920×1080)/1.3M(1280×960)/ 720P(1280×720)/D1(704×576/704×480)/ VGA(640×480)/CIF(352×288/352×240)	
Frame Rate	Main Stream	4M(1~20fps)
	Sub Stream	3M(1~25/30fps)
	Third Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate Control	CBR/VBR	
Bit Rate	H264:24K ~ 8Mbps	
Day/Night	Auto(ICR) / Color / B/W	
BLC Mode	BLC / HLC / WDR(120dB)	
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual	
Gain Control	Auto/Manual	
Noise Reduction	3D DNR	
Motion Detefion	Off / On (4 Zone, Rectangle)	
Region of InterestSmart IR	Off / On (4 Zone)Support	

Digital Zoom	16x
Flip	0°/90°/180°/270°
Mirror	Off / On
Privacy Masking	Off / On (4 Area, Rectangle)
Audio	
Compression	N/A
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	HTTP; HTTPs; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP
Interoperability	ONVIF, PSIA, CGI
Streaming Method	Unicast / Multicast
Max. User Access	10 Users / 20 Users
Edge Storage	NAS / Local PC for instant recording
Web Viewer	IE, Chrome, Firefox, Safari
Management Software	SPRO CSS
Smart Phone	iPhone, iPad & Android
General	
Power Supply	DC12V, PoE (802.3af) (Class 0)
Power Consumption	<9.75W
Operating Conditions	-30° C ~ +60° C / Less than 95% RH
Storage Conditions	-30° C ~ +60° C / Less than 95% RH
Ingress Protection	IP66
Casing	Metal
Dimensions	Φ122mm x 104.9mm(4.8'' x4.1'')
Net Weight	0.59Kg(1.30lb)
Gross Weight	0.71Kg(1.57lb)

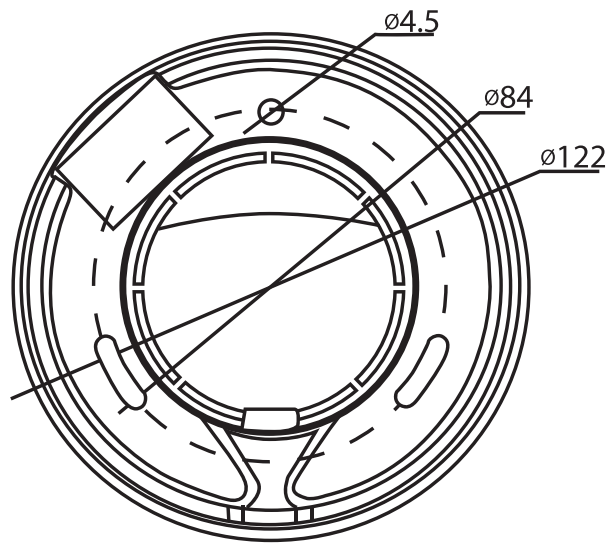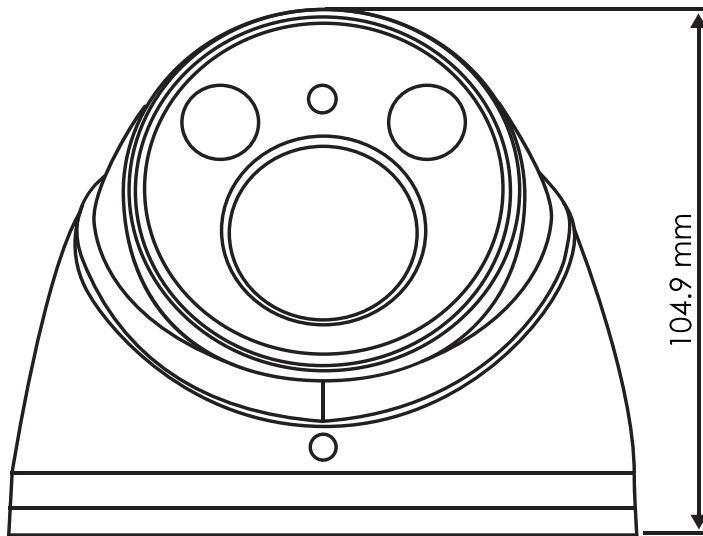

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved