

**SPRO**<sup>IP</sup>



# DHIPQ50/28LW/40-M-I-D

5MP IP ColourNight Bullet Camera with AI Technology



**COLOURNIGHT**



## Key Features:

- 5 megapixel
- H.265
- 2.8mm Lens
- Up to 40m LED distance (smart LED)
- SMD (Smart motion detection)
- Intrusion (human & vehicle classification)
- Tripwire (human & vehicle classification)
- Microphone built-in (audio over CAT5e cable)
- 120dB WDR
- IP67 waterproof
- DC 12V/POE



## SPECIFICATIONS

<b>Model Number</b>	DHIPQ50/28LW/40-M-I-D
<b>Image Sensor</b>	1/2.7"5Megapixel progressive CMOS
<b>Effective Pixels</b>	2592(H) X 1944(V)
<b>ROM</b>	128 MB
<b>RAM</b>	512 MB
<b>Scanning System</b>	Progressive

(continued)

<b>Electronic Shutter Speed</b>	Auto/Manual 1/3 s–1/100000 s
<b>Min. Illumination</b>	0.003 Lux@F1.0
<b>S/N Ratio</b>	>56 dB
<b>Illumination Distance</b>	40 m
<b>Illuminator On/Off Control</b>	Auto/Manual
<b>Illuminator Number</b>	2 (Warm light)
<b>Pan/Tilt/Rotation Range</b>	Horizontal: 0°–360°; vertical: 0°–90°; rotation: 0°–360°

### Lens

<b>Lens Type</b>	Fixed focal
<b>Mount Type</b>	M12
<b>Focal Length</b>	2.8 mm
<b>Max. Aperture</b>	F1.0
<b>Field of View</b>	Horizontal:98°; vertical: 71°; diagonal: 129°
<b>Iris Type</b>	Fixed
<b>Close Focus Distance</b>	1.2 m
<b>DORI Distance</b>	Detect: 67.4 m   Observe: 27 m   Recognize: 13.5 m   Identify: 6.7 m

### Professional, Intelligent


<b>Perimeter Protection</b>	Tripwire; intrusion (Recognition of human and vehicle)
<b>Intelligent Search</b>	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos

### Video

<b>Video Compression</b>	H.265; H.264; H.264H; H.264B; MJPEG
<b>Smart Codec</b>	Smart H.265+ / Smart H.264+
<b>Video Frame Rate</b>	Main stream (2592 × 1944@1–20 fps); (2688 × 1520@1–25/30 fps) Sub stream (704 × 576 @1-25 fps/704 × 480 @ 1-20fps) Third stream (1920 × 1080 @1-25/30 fps)
<b>Stream Capability</b>	3 streams
<b>Resolution</b>	5M (2592 × 1944); 4M (2688 × 1520 / 2560 × 1440); 3M (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (354 × 288/354 × 240)
<b>Bit Rate Control</b>	CBR/VBR

<b>Video Bit Rate</b>	H.264: 32 Kbps–8192 Kbps
	H.265: 12 Kbps–8192 Kbps
<b>Day/Night</b>	Color/ B/ W
<b>BLC</b>	Yes
<b>HLC</b>	Yes
<b>WDR</b>	120 dB
<b>Scene Self-adaptation</b>	Yes
<b>White Balance</b>	Auto/natural/street lamp/outdoor/manual/regional custom
<b>Gain Control</b>	Auto/Manual
<b>Noise Reduction</b>	3D DNR
<b>Motion Detection</b>	OFF/ON (4 areas)
<b>Region of Interest(RoI)</b>	Yes (4 areas)
<b>Smart LED</b>	Yes
<b>Image Rotation</b>	0°/90°/180°/270° (Support with 2592×1944 resolution and lower)
<b>Mirror</b>	Yes
<b>Privacy Masking</b>	4 areas
<b>Audio</b>	
<b>Built-in MIC</b>	Yes
<b>Audio Compression</b>	PCM; G.711a; G.711Mu; G.726; AAC; G.723
<b>Alarm</b>	
<b>Alarm Event</b>	motion detection; video tampering; tripwire; intrusion; scene changing; audio detection; voltage detection; external alarm; SMD
<b>Network</b>	
<b>Network</b>	RJ-45 (10/100 Base-T)
<b>SDK and API</b>	Yes
<b>Protocol</b>	IPv4;IPv6;HTTP;HTTPS;TCP;UDP;ARP;RTP;RTSP;RTCP;RTMP;SMTP;FTP;SFTP; DHCP;DNS;DDNS;QoS;UPnP;NTP;Multicast;ICMP;IGMP;NFS;PPPoE; 802.1x;SNMP
<b>Interoperability</b>	ONVIF(Profile S/Profile G);CGI;P2P;Milestone;Genetec
<b>User/Host</b>	20 (Total bandwidth: 80M)

<b>Edge Storage</b>	FTP; SFTP; Micro SD Card (support max. 256 G); Cloud; NAS
<b>Browser</b>	IE: IE8, IE9, IE11, Chrome, Firefox
<b>Management Software</b>	SPRO CSS
<b>Mobile Phone</b>	iPhone, iPad & Android
<b>Certification</b>	
<b>Certifications</b>	CE-LVD: EN62368-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B
<b>Port</b>	
<b>Audio Input</b>	1 channel (RCA port)
<b>Audio Output</b>	1 channel (RCA port)
<b>Alarm Input</b>	1 channel in: 5mA 3V–5V DC
<b>Alarm Output</b>	1 channel out: 300mA 12V DC
<b>General</b>	
<b>Power Supply</b>	12V DC/PoE
<b>Power Consumption</b>	Basic power consumption: 2.0W (12V DC); 2.6W (PoE) Max. power consumption (H.265 + warm light + IVS + sound alarm + red and blue lights flash): 7.5W (12V DC); 8.8W (PoE)
<b>Operating Conditions</b>	-40°C to +60°C (-40°F to +140°F)/less than ≤95%
<b>Storage Conditions</b>	-40°C to +60°C (-40°F to +140°F)
<b>Ingress Protection</b>	IP67
<b>Casing</b>	Metal + plastic
<b>Dimensions</b>	288.4 mm × 94.4 mm × 84.7 mm (L × W × H)
<b>Net Weight</b>	1.0 kg
<b>Gross Weight</b>	1.23 kg

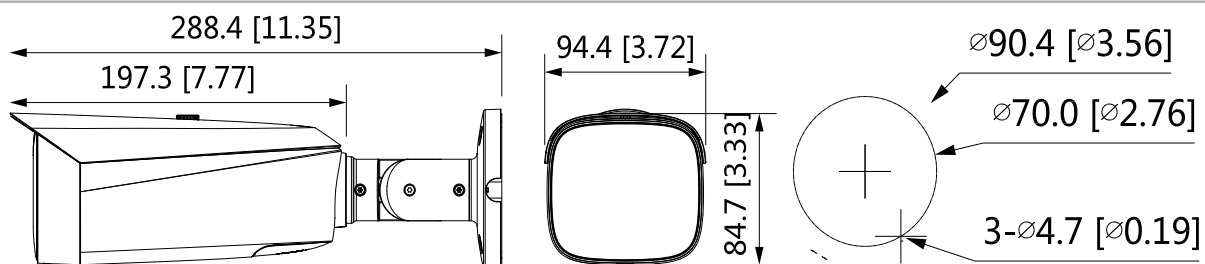

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved