

SPRO[®] IP



DHIPD60/28RV-G

6 Megapixel IP Vandal Resistant Dome Camera



6 MEGAPIXEL



2.8 MM



30m IR



VANDAL PROOF



IP67



Key Features:

- 6 Megapixel progressive CMOS
- H.265 & H.264 dual-stream encoding
- Max 20fps@6MP(3072x2048), 25fps@4MP(2688x1520)
- WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC
- Multiple network monitoring: Web viewer & CMS(SPRO CSS)
- 2.8mm fixed lens
- Up to 30m IR distance
- IP67 waterproof and IK10 vandal resistance
- DC12V/PoE

SPECIFICATIONS

Model Number	DHIPD60/28RV-G
Image Sensor	1/2.9" 6Megapixel progressive scan CMOS
Effective Pixels	3072(H) X 2048(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/100000s
Min. Illumination	0.04Lux/F1.6(Color,1/3s,30IRE)
	0.4Lux/F1.6(Color,1/30s,30IRE)
	0Lux/F1.6(IR on)
S/N Ratio	More than 50dB
Lens	
Lens Type	Fixed

(continued)

(continued)

Mount Type	Board-in
Focal Length	2.8mm
Max. Aperture	F1.6
Angle of View	H:98°, V:67°
Focus Control	Fixed
Close Focus Distance	0.9m
Intelligence	
Advanced Intelligent Functions	Face Detection
IVS	Tripwire, Intrusion, Object Abandoned/Missing
Video	
Compression	H.265+/H.265/H.264+/H.264
Streaming Capability	3 Streams
Resolution	(3072×2048)/(3072×1728)/(2592×1944)/(2688×1520)/(2560×1440)/ (2304×1296)/1080P(1920×1080)/SXGA(1280×1024)/1.3M(1280×960)/ 720P(1280×720)/D1(704×576/704×480)/CIF(352×288/352×240)
Frame Rate	Main Stream: 6MP (1~20fps), 4MP(1~25fps) Sub Stream: D1(1~25fps) ; Third Stream: 1080P(1~25fps)
Bit Rate Control	CBR/VBR
Bit Rate	H.264: 24K ~ 10240Kbps H.265: 14K ~ 9984Kbps
Day/Night	Auto(ICR) / Color / B/W
BLC Mode	BLC / HLC / WDR(120dB)
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Gain Control	Auto/Manual
Noise Reduction	3D DNR
Motion Detection	Off / On (4 Zone, Rectangle)
Region of Interest	Off / On (4 Zone)
Smart IR	Support
Digital Zoom	16x
Flip	0°/90°/180°/270°
Mirror	Off / On
Privacy Masking	Off / On (4 Area, Rectangle)


(continued)

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP;NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP
Interoperability	ONVIF, PSIA, CGI
Streaming Method	Unicast / Multicast
Max. User Access	10 Users
Edge Storage	Local PC for instant recording
Web Viewer	IE, Chrome, Firefox, Safari
Smart Phone	iPhone, iPad & Android

General

Power Supply	DC12V, PoE (802.3af)(Class 0)
Power Consumption	< 5.5W
Operating Condition	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10
Casing	Metal
Dimensions	Φ109.9mm × 81mm (4.33" x 3.19")
Net Weight	0.41Kg
Gross Weight	0.53Kg

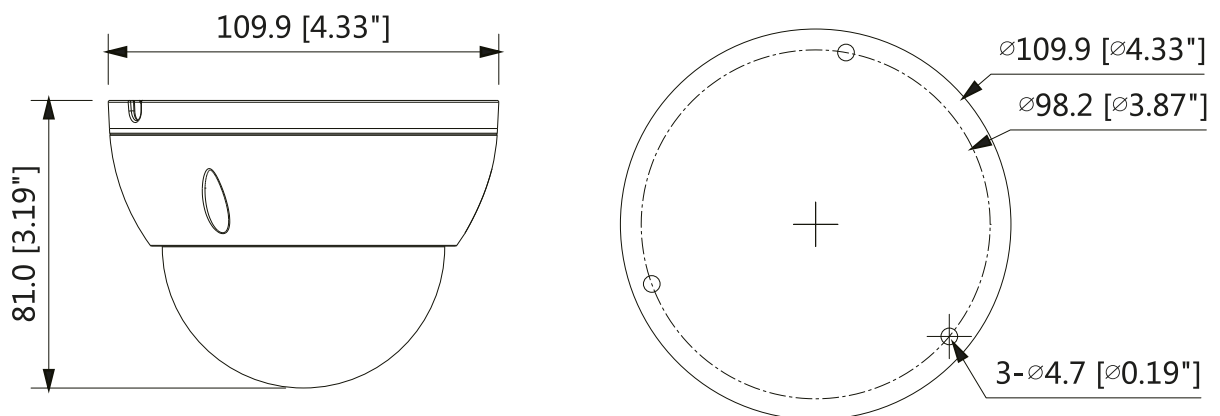

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved