

SPRO

HDMIMONITOR-22-K

21.5" LED CCTV MONITOR



Key Features:

- LED-Backlit
- FHD (1920x1080)
- 1 x HDMI input
- 1 x VGA Input
- Speaker built-in
- Wall mountable
- Audio & video over HDMI

SPECIFICATIONS

Model Number	HDMIMONITOR-22-K
Display Type	LED Backlight
Screen Size	21.5"
Pixel Pitch (mm)	0.248x0.248
Max Resolution	1920x1080
Brightness (cd/m²)	250
Contrast	3000:1
Response Time (ms)	7
Colour	16.7M
Viewing Angle	Horizontal: 178°, Vertical: 178°

(continued)

Interface

Input 1x VGA, 1x HDMI, 1x Audio In

Audio

Audio Input 1, 3.5mm mini-jack

Speaker 2x 1.5W

OSD

Multi-Language 8 (English,French,Spanish,German,Russian,Korean, Japanese, Chinese)

Mounting

VESA (mm) 100x100

Wall-mounted Thread 4-M4 Threaded hole

General

Power Supply DC 12V, 2A

Consumption (W) ≤24 (on) ; ≤0.5(Standby)

Operations Temperature 0°C ~ 40 °C

Operations Humidity 20%~85% (No Condensation)

Storage Temperature -10°C ~ 50°C

Storage Humidity 10%~90% (No Condensation)


Dimensions (WxHxD) 508.02*307.90*40.10(No Pedestal)
508.02*392.87*200.00(With Pedestal)

Weight Net Weight:2.3 Gross Weight:3.4

Accessory

Standard HDMI cable、Adapter、Pedestal、Quick Guide

Dimensions

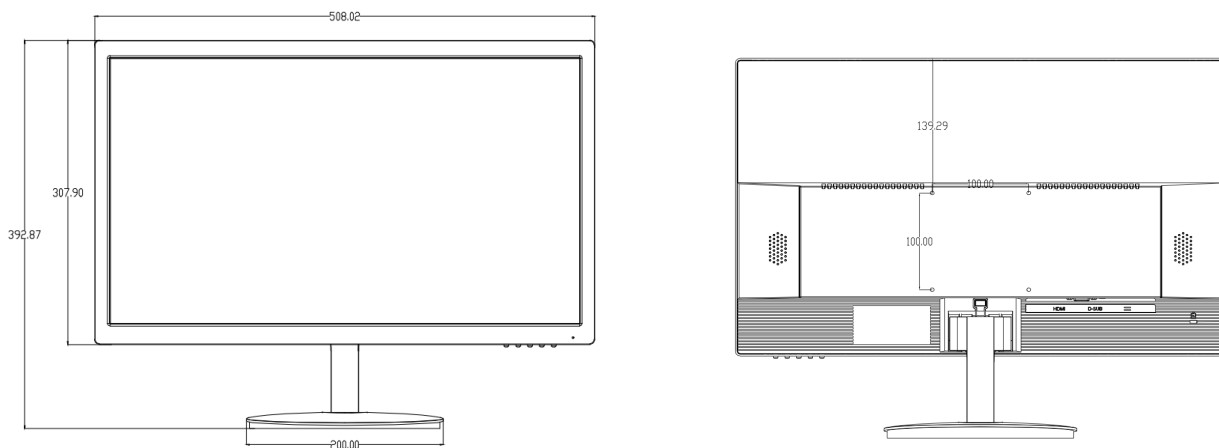

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved