

SPRO[®] IP



PTZCONTROLLER04-IP

PTZ Control Keyboard

Key Features:

- Control SPRO IP and CVI PTZ cameras
- 3 axis joystick
- LCD display
- On screen menu
- RJ45, RS485 & USB connection
- Preset Position, Auto Scan, Auto Pan, Auto Tour & Pattern Auxiliary Functions
- On-Screen Menu & User Operation Procedure Tips

SPECIFICATIONS

| | |
|-------------------------------|---|
| Model Number | PTZCONTROLLER04-IP |
| Keyboard Keypanel | Electromechanical |
| Joystick | 3-axis, vector-solving, with twisting, return to-center head |
| Keyboard Connector | RJ-45, RS232, RS485, RS422, USB |
| Keyboard Communication | Direct Mode, Network Mode |
| Direct Mode | Interface: RS232/2 RS485, DVR Protocol: DH2 Dome Protocol: DH-SD1/PELCO-D/PELCO-P, etc |
| Network Mode | Interface: RJ45, DVR/Network Dome: IP Address/Port/Protocol |
| Display | LCD, 75.2mm x 33.85mm |

(continued)


(continued)

| | |
|---|------------------------|
| Maximum Number of Users | 64 (including "admin") |
| Max RS485 Addresses | 256 |
| Max Number of PTZ(IPC)that can be added over Network (Each user) | 2048 |

Environmental

| | |
|----------------------------|--|
| Power Supply | Power adapter, input 100V~240V 50Hz/60Hz, output DC12V/2A |
| Power Consumption | 5W |
| Working Temperature | -10C~+55C |
| Working Humidity | 10% ~ 90% |
| Atmosphere Pressure | 86kpa~106kpa |
| Dimensions | 330mm×139mm×53mm (W×D×H)(height: 103mm including joystick) |
| Weight | 1.3kg |

Dimensions (mm)

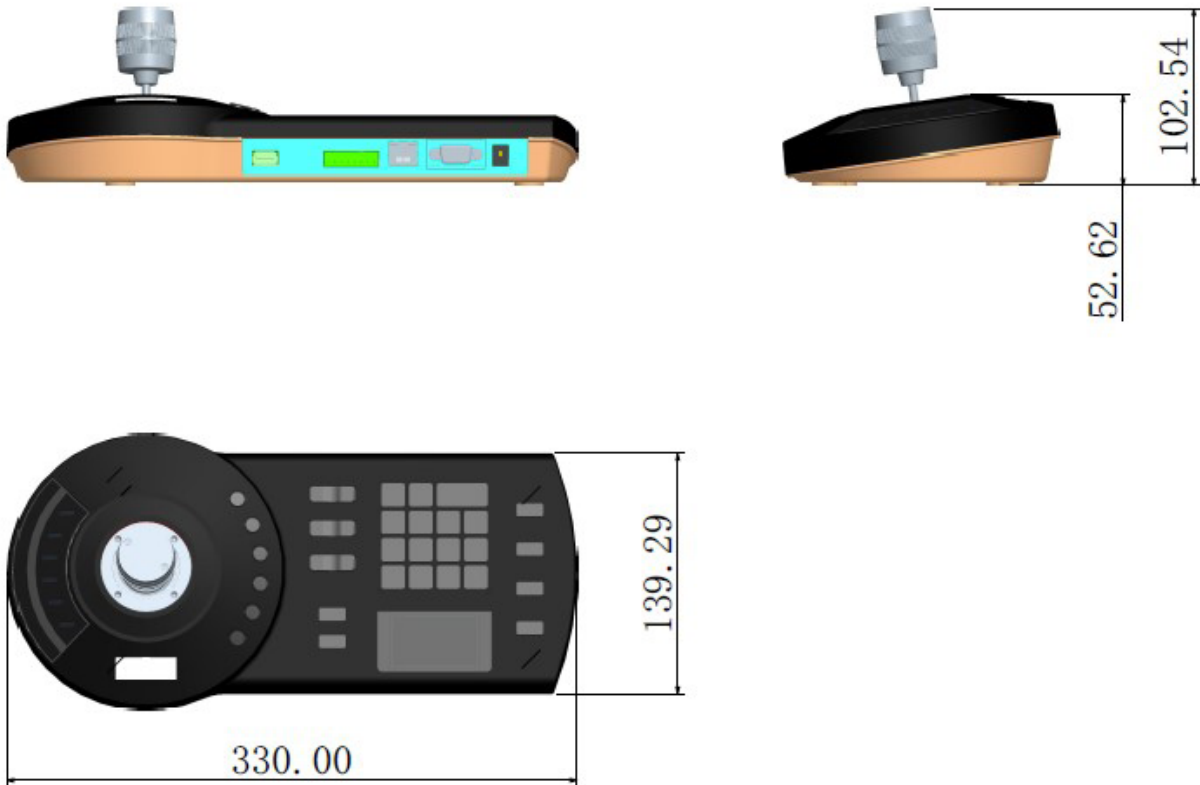

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved

(continued)